



Log Set Assembly: LOGS-SL36S

LOG PLACEMENT INSTRUCTIONS


1. **CAUTION: LOGS ARE FRAGILE. CAREFULLY REMOVE LOGS FROM PACKAGING. SEE FIGURE 1.**
2. Remove trim door and glass.
3. Place a single layer of dime size and shape pieces of Glowing Ember (050-721) onto the top of the burner.

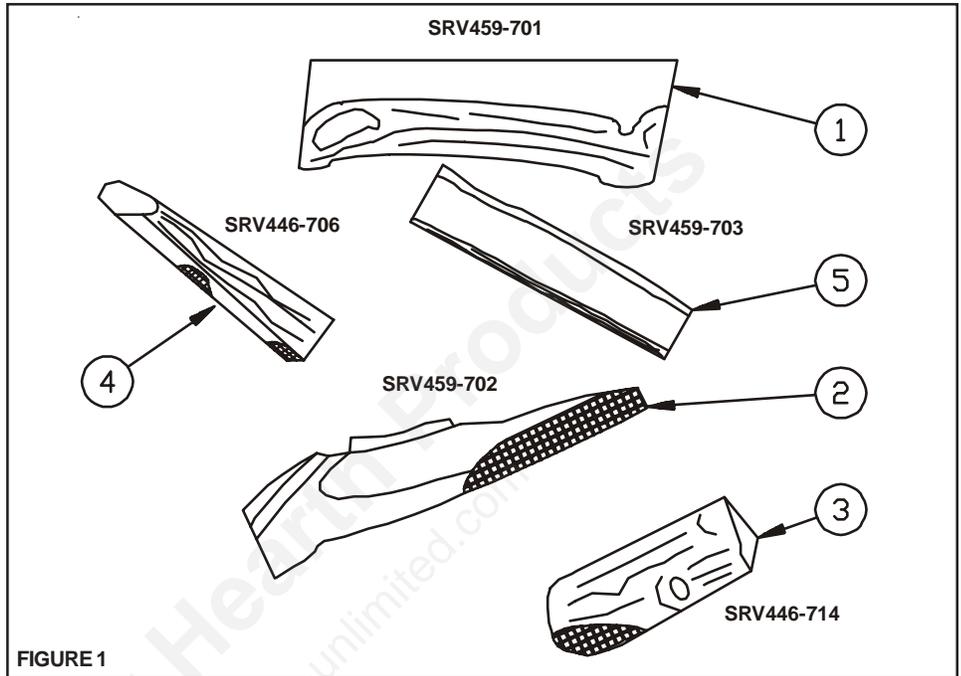


4. Place Log 1 so that the back left is touching the back of firebox and the right side is 1-1/2 in. from the back and sticks out 2 in. from the grate.

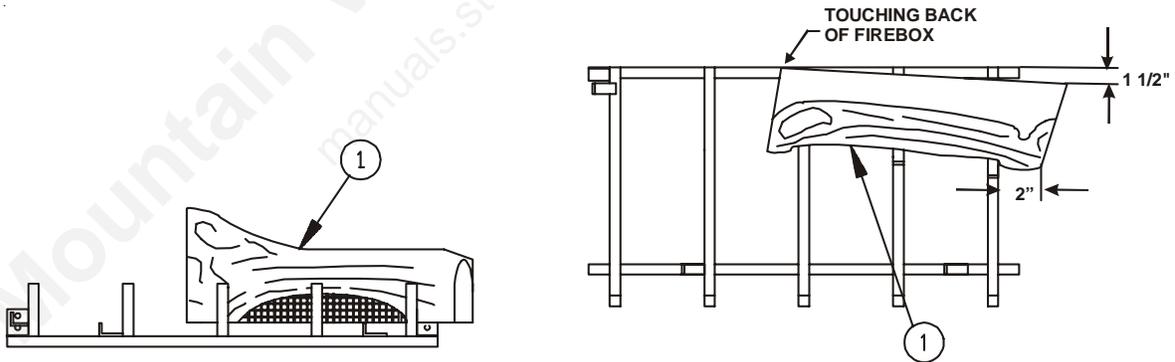


5. Place Log 2 so that the lower left end is between Tab B and the bar on the left side of the grate. The right end should rest on Log 1.

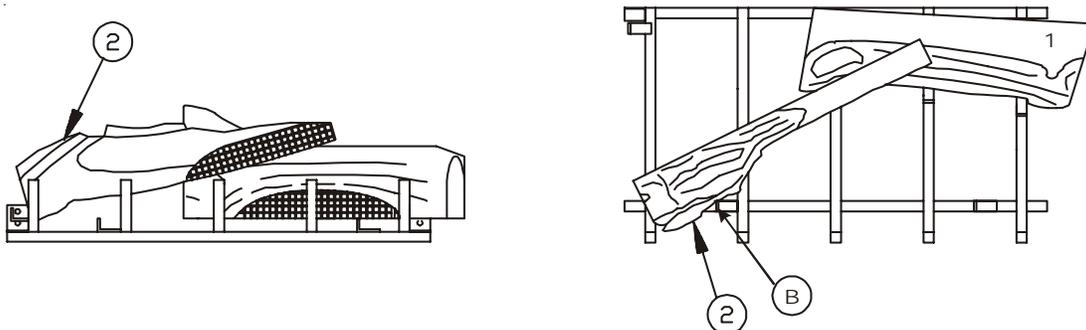

6. Place Log 3 against Tabs C & D so that the right end is 2 in. from the right edge of the grate.

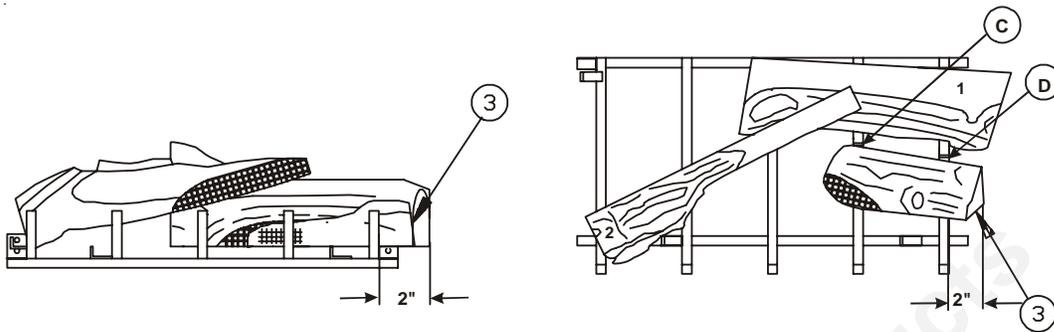

7. Place Log 4 so that left end is against the back of firebox and Tab E. The right end rests across Log 2 and touches Log 1.

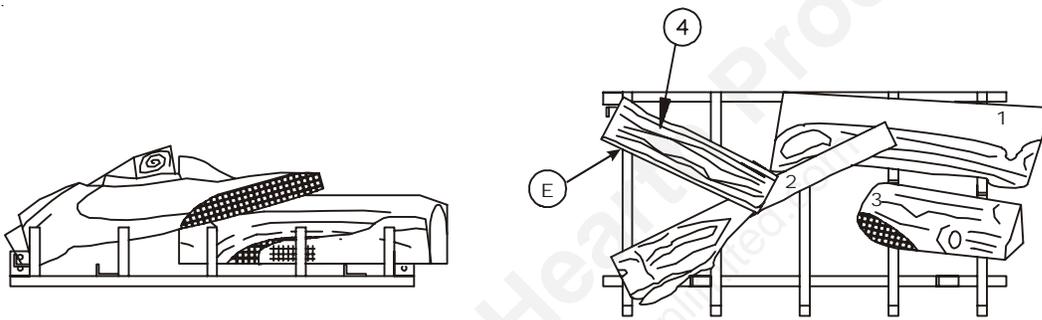

8. Place Log 5 so that right end is between Tab F and the bar on the grate. The left end rests across Log 2 and touches Log 4.

