



**Model:
SL-750TR, SL-750TRS
and SL-750TV**

**LOG PLACEMENT
INSTRUCTIONS**




LOG NUMBER 1:

Place log number 1 on grate such that the back sets against two tabs and the left side sets against tab.

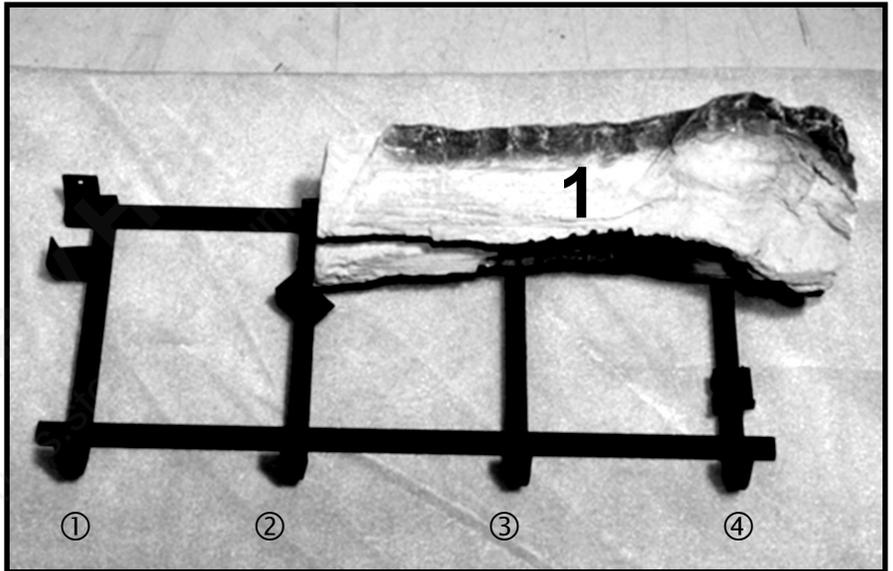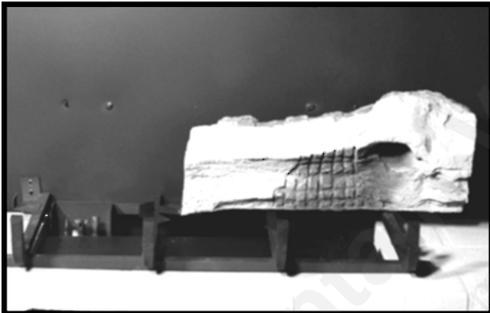


LOG NUMBER 2:

Place log number 2 on grate such that fork of log sets in prong of bar #3. Rotate log clockwise until it stops against tab on bar #2.

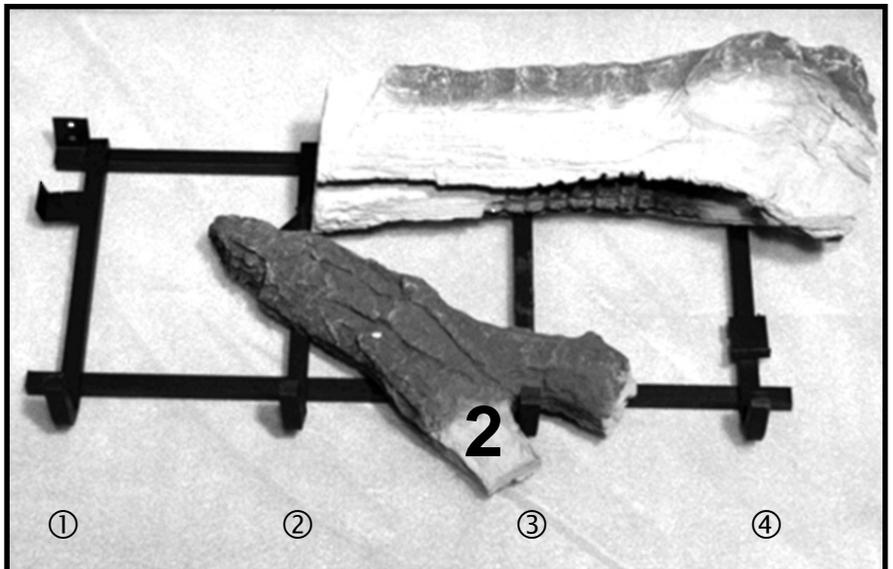



LOG NUMBER 3:

Place log number 3 on grate such that the forked end fits around prong of bar #1. The other end of the log rests on flat spot of log number 1.

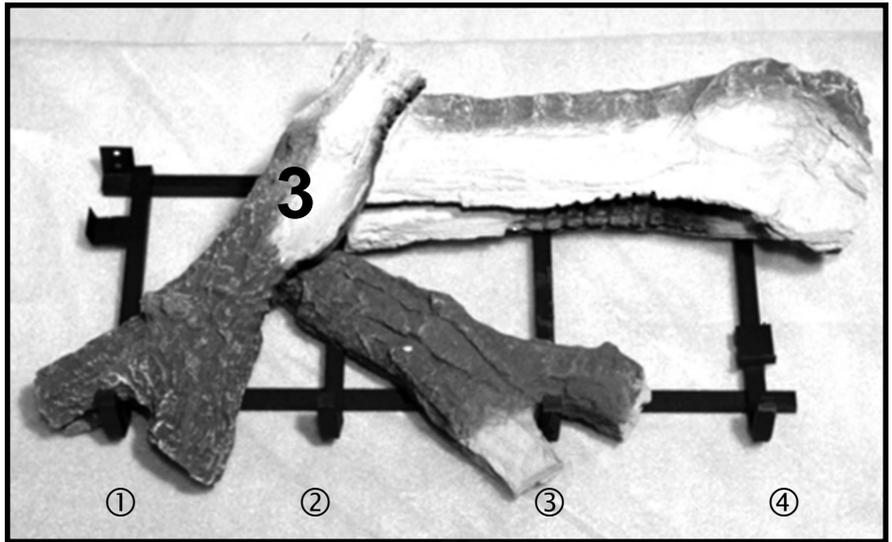


LOG NUMBER 4:

Place log number 4 onto grate such that the bottom of log sets between tab and prong on bar #4. The top part of log should rest upon flat spot of log 3.

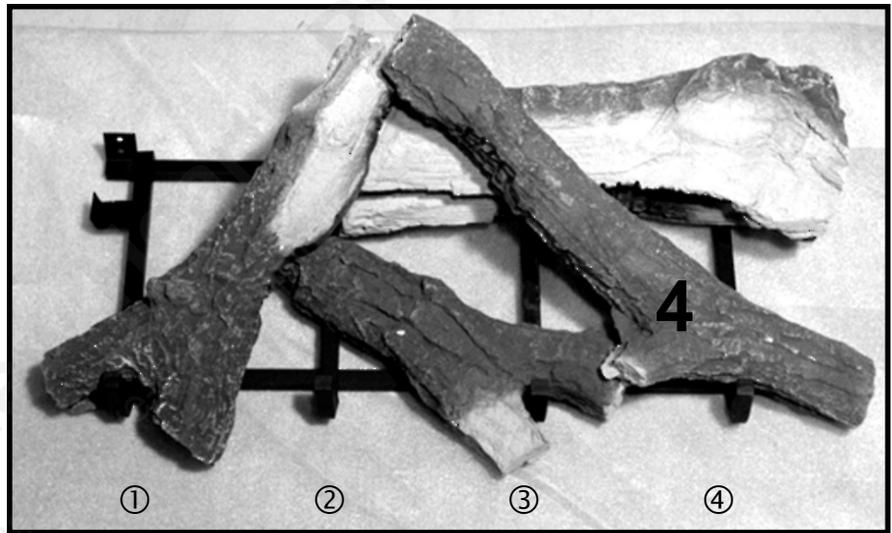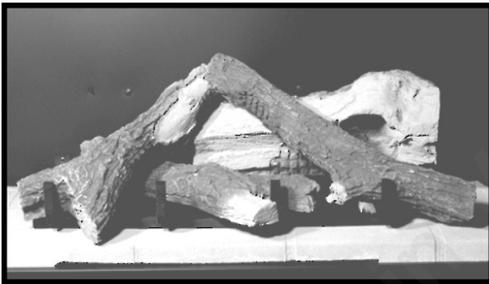

LOG NUMBER 5:

Place log number 5 onto grate such that the bottom of log sets on tab. The top part of log should rest on flat spot of log number 3.

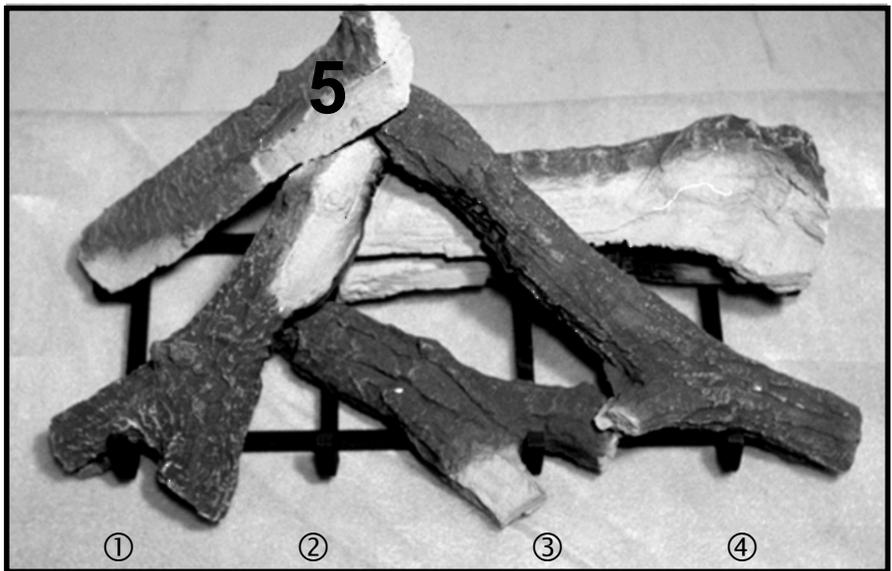

FINAL CHECK: After starting fireplace (See Lighting Instructions) make sure logs do not cross directly on top of the flames, this can lead to sooting. If they do, adjust them slightly to the left or right so that the flame comes cleanly up between them.