


STARLITELX 36/42


OUTDOOR DECORATIVE GAS FIREPLACE

Framing Dimensions

Opening	StarLiteLX36	StarLiteLX42
A	42-3/4" (1086)	48-3/4" (1238)
B	46-1/2" (1181)	46-1/2" (1181)
C	23-5/8" (600)	29-5/8" (753)
D	11-1/4" (286)	14-1/4" (362)
E	63-1/2" (1613)	69-1/2" (1765)
F	31-3/4" (807)	34-3/4" (883)
G	20-1/2" (521)	20-1/2" (521)
H	44-1/4" (1124)	49-1/8" (1248)

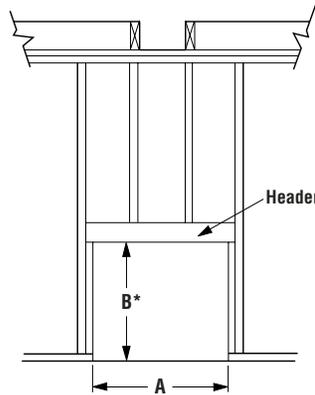


* Increase Framing Height By 3/4"
When Using Optional Drain Pan

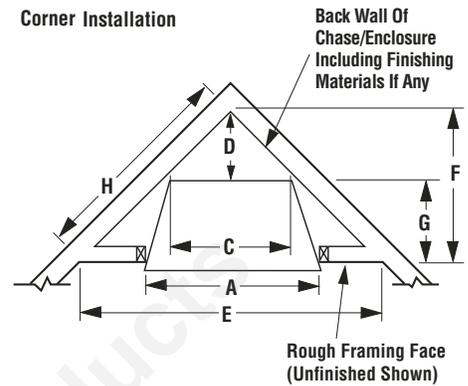


Parallel Installation

Rough Framing Face (Unfinished Shown)


Back Wall Of Chase/Enclosure Including Finished Materials - If Any

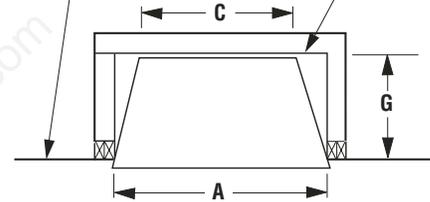

These appliances comply with National Safety Standards and are tested by PFS Corporation (Report No. F14-020) and listed by ANSI Z21.97 (2017) in USA and to CSA 2.41 (2017) in Canada, as outdoor gas fireplaces.




Listing Information

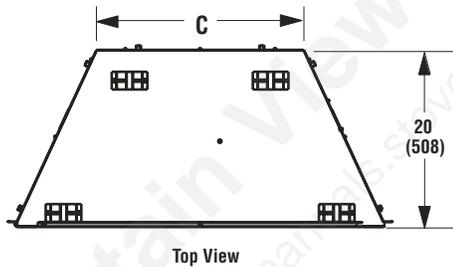


Top View

Dimensions - Inches (millimeters)			
Model	A	B	C
StarLiteLX36	37 (940)	41-3/4 (1061)	23-1/2 (597)
StarLiteLX42	43 (1092)	47-3/4 (1213)	29-1/2 (749)

Fireplace Specifications

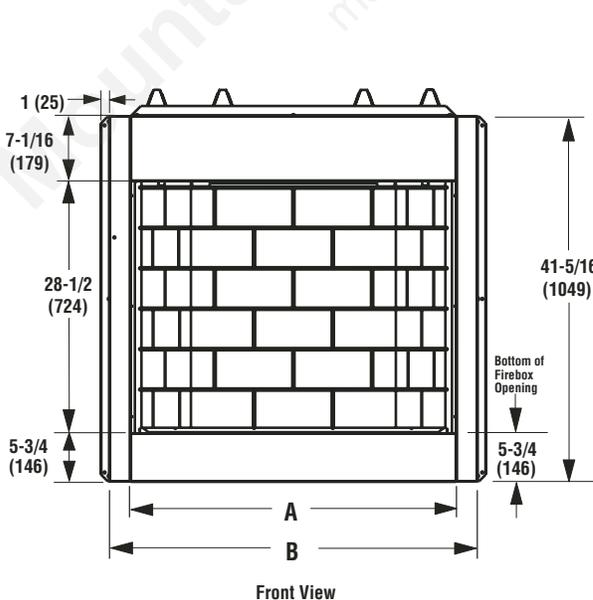

Front View


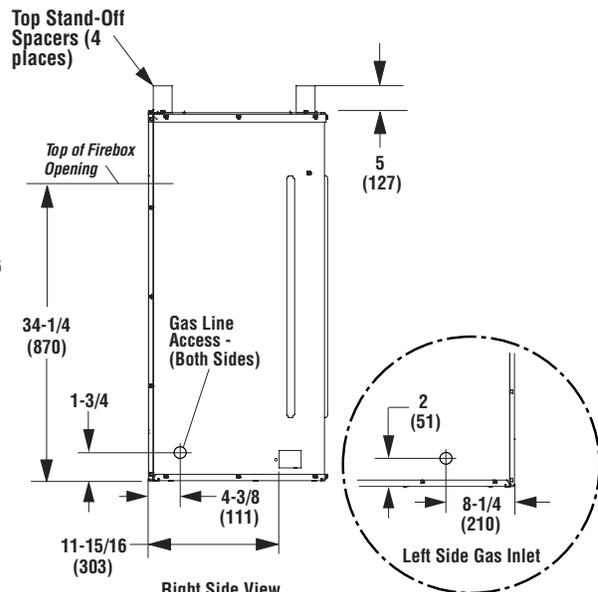


Right Side View

STARLITELX 36/42



Cat.#	Model	Ship Wt.	Ship. Vol.	Cat.#	Model	Ship Wt.	Ship. Vol.
F4110	StarLiteLX36ZENWS	260 lb.s	28.424 Cu. Ft.	F4114	StarLiteLX42ZENWS	290 lb.s	32.184 Cu. Ft.
F4111	StarLiteLX36ZENWH	260 lb.s	28.424 Cu. Ft.	F4115	StarLiteLX42ZENWH	290 lb.s	32.184 Cu. Ft.
F4112	StarLiteLX36ZEPWS	260 lb.s	28.424 Cu. Ft.	F4116	StarLiteLX42ZEPWS	290 lb.s	32.184 Cu. Ft.
F4113	StarLiteLX36ZEPWH	260 lb.s	28.424 Cu. Ft.	F4117	StarLiteLX42ZEPWH	290 lb.s	32.184 Cu. Ft.

Typical Installation

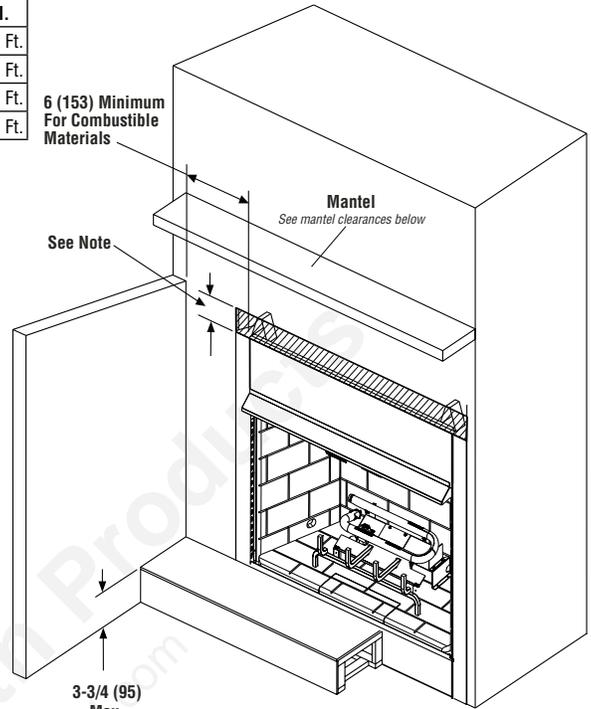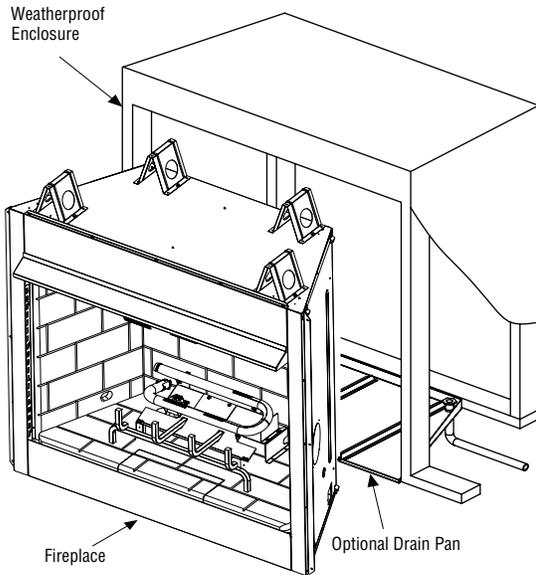

NOTE: The area above the face to the top of the spacers must be non-combustible materials.

Mantel Clearances

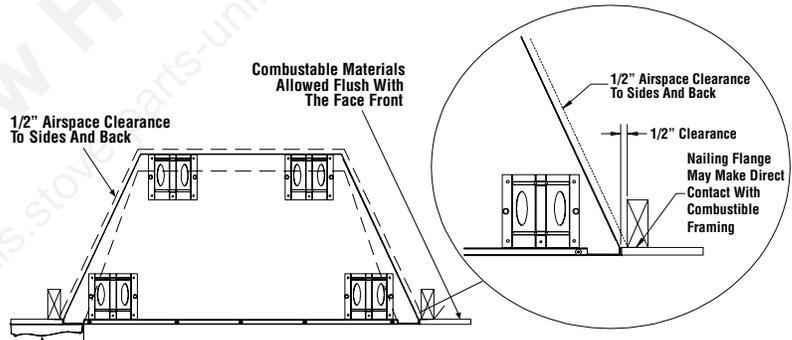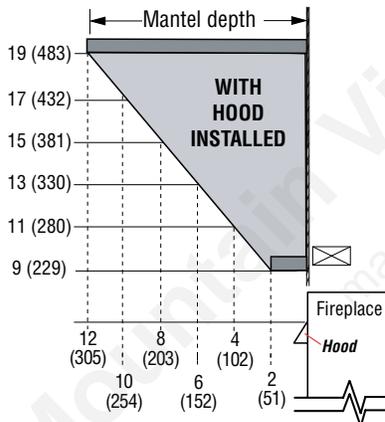

TOP VIEW
Noncombustibles May Overlap The Face
No Material Within The Face Opening


CLEARANCES

Minimum clearance to combustibles for the fireplace is as follows; sides and back - 1/2" (13mm), combustible floor - 0" (0mm), adjacent wall 6" (152mm), ceiling - 50" (1270mm).

NOTE: Clearance behind the nailing flange for both fireplace models is 1/2" (13mm).

NOTE: Adjacent wall considerations are for an adjacent wall to only a single side. Walls should not be placed at the minimum distance on both sides of the fireplace. Allow at least 4 feet on one side of the fireplace.

The StarLiteLX Series Outdoor Gas Fireplace is designed for outdoor use. It may also be installed in screened porches and lanais that meet these minimum requirements:
Minimum porch area - 96 sq. ft.
Minimum ceiling height - 7' 8"
A minimum of two (2) walls can be screened but must be open to outside ventilation.
Minimum screen area - 64 sq. ft.
Minimum screen top height - 6' 8"

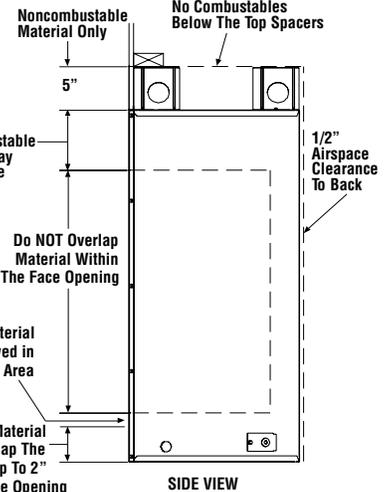

Only Noncombustible Material May Overlap The Top Face

Do NOT Overlap Material Within The Face Opening

No Material Allowed In This Area

Combustible Material May Overlap The Face Bottom Up To 2" Below The Face Opening

SIDE VIEW

Clearances