


## Quest Baffle Installation

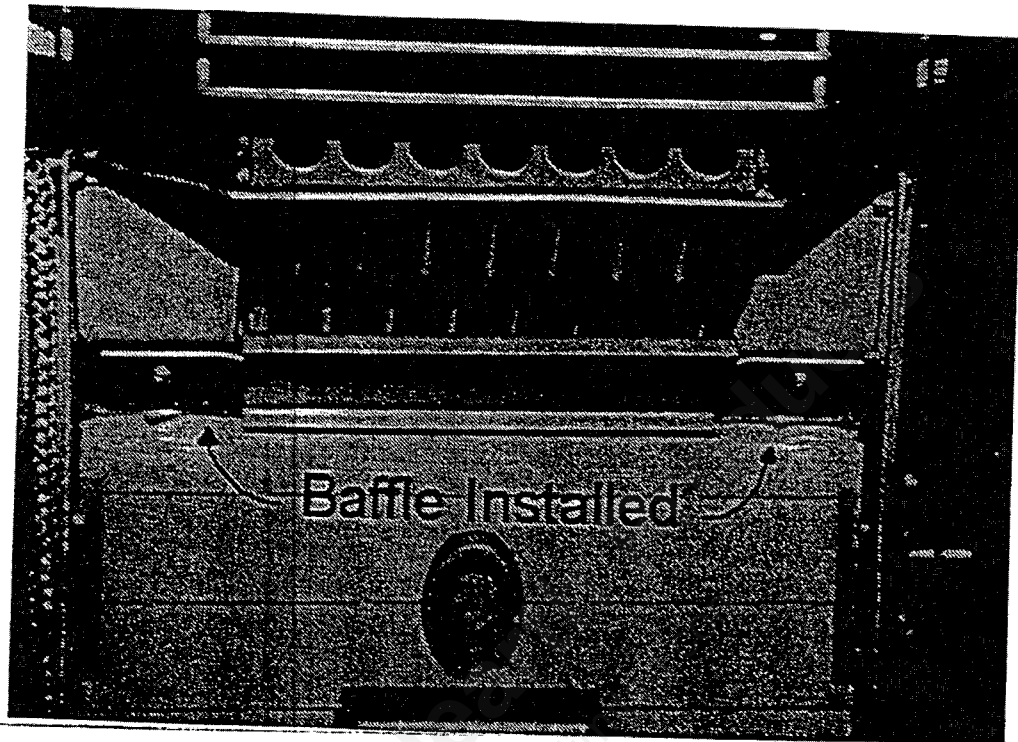

No fastener removal or adjustment should be required for replacement of the heat exchanger baffle. Simply hang the replacement baffle over the existing screws. Do **not** tighten the screws. The baffle is designed to hang loose so it is easily removed for cleaning.

Extra screws are provided in the kit in case the screws in the stove are damaged or missing. If installed properly the bottom of the baffle should be 1/4" above the top surface of the firebrick.

Remember. Do **not** tighten screws all the way down!

TOP

