

Models:

Northstar-C, C40-C, WarmMajic-II

MESH-HHT-C - Fire Screen

This fire screen has been tested for use with specific Hearth & Home Technologies products. Check with your local building code agency before you begin installation to ensure compliance with local codes, including the need for permits and follow-up inspections. If you encounter any problems regarding code approvals, or if you need clarification of any of the instructions contained here, contact your Hearth & Home Technologies dealer. For the dealer nearest you, please visit www.hearthnhome.com

CAUTION! Risk of Cuts, Abrasions or Flying Debris. Wear protective gloves and safety glasses during installation. Sheet metal edges are sharp.

Included in Kit: (1) Fire screen, (2) handles and fasteners package

Tools Required: Phillips Head screwdriver

1. Insert 8-32 screws through tabs from backside of screen. Using a Phillips head screwdriver, thread screws into handles and tighten.
2. Open both doors of fireplace.
3. Lift the screen up and over the top of the doors and place it down on the top door hinges.
4. Make sure the bottom brackets on the screen hook over and into the fireplace. See Figure 1.

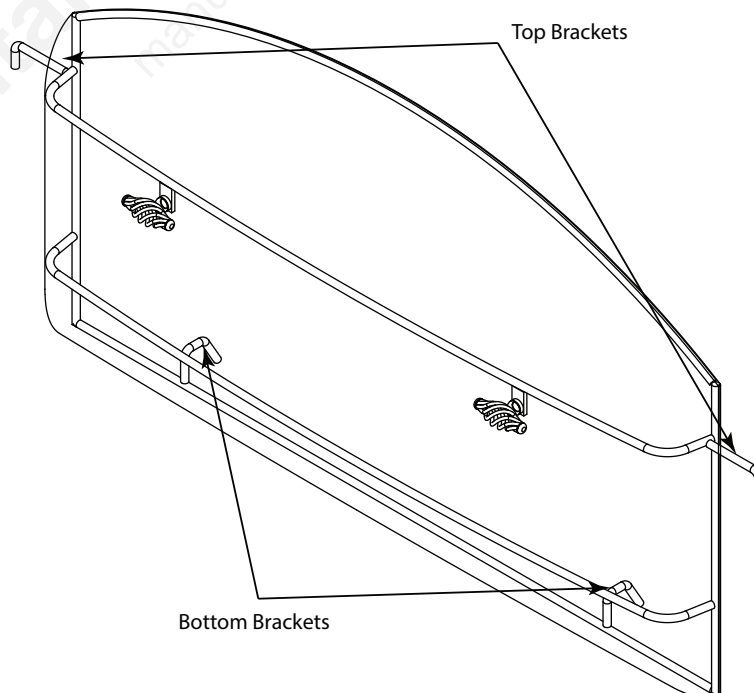


Figure 1