

# STONES-FUSION, MEDIA-STONES-30

MODELS: SL-550F, SL-750F, SL-5F, SL-7F, ECLIPSE-32, ECLIPSE-36, CD4236-MOD, CD4842-MOD

For use with STPR-MOD-KIT: GDST4336IFT, GDFL4136IFT, ST-36TRB-IFT, PIER-36TRB-IFT

## - Media Installation Instructions -



Leave this manual with party responsible for use and operation.

**CAUTION! Risk of Cuts, Abrasions or Flying Debris.** Wear protective gloves and safety glasses during installation.

**WARNING! Choking Hazard!** Keep stones and lava rock out of reach of children.

### KIT CONTENTS

- Stones (quantity of 30)

### INSTALLATION:

#### SL-550F, SL-750F, ECLIPSE-32, ECLIPSE-36

(For CD-4236-MOD and CD4842-MOD, proceed to page 2)

(For GDST4335-IFT, GDFL4136-IFT, ST-36TRB-IFT and PIER-36TRB-IFT with the STPR-MOD-KIT installed, proceed to page 3.

1. Ensure rock placement jig is in place before beginning placement of stones. Remove log locating pins if installed. The number of pins will vary depending on the model. Use a Phillips screwdriver. Figure 1 shows location of pins and jig.

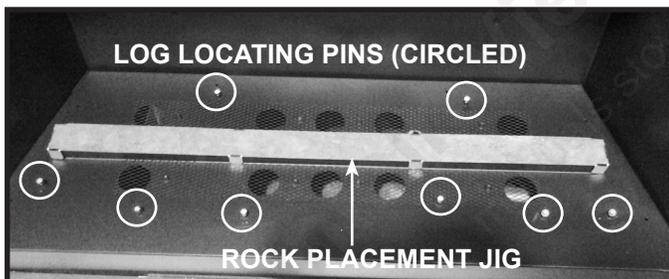


Figure 1. Location of Pins and Jig

2. Place a thin layer of lava rock on the base pan. Do NOT place on burner top. See Figure 2.

**WARNING! Risk of Explosion!** DO NOT place lava rock on burner top. Improperly placed lava rock interferes with proper burner operation.

**Note:** When applying Lava Rock in areas of the base pan that is covered by mesh, apply only one layer of Lava Rock.



Figure 2. Lava Rock Placed on Base Pan.

3. Place stones on the base pan in a random manner as shown in Figure 3. DO NOT place rocks on the rock placement jig. You may have extra stones depending on the look desired.

**⚠ WARNING**

**RISK OF EXPLOSION!**

- Place stones according to instructions.
- Do NOT place stones on burner top.
- Do NOT place stones in a position that they may fall into area in front of pilot.
- Do NOT use more than 30 stones per fireplace.
- Do NOT stack stones. Place in single layer.
- Use ONLY Hearth & Home Technologies-approved optional media with this appliance.

Improperly placed stones interfere with proper burner operation.

Delayed ignition may occur.



Figure 3. Stones Placed on Base Pan.

4. Remove rock placement jig. Ensure that the stones are approximately 1/4 inch from the burner tube slot.



Figure 4. Stones in Place.

## INSTALLATION:

### CD4236-MOD, CD4842-MOD

**WARNING! Risk of Explosion!** Follow media placement instructions. Improperly placed media interfere with proper burner operation. Fireplace will not function properly. Delayed ignition may occur.

**WARNING! Choking Hazard!** Keep media out of reach of children.

- DO NOT place media in pilot opening.
- DO NOT place media in a position that it may fall into the pilot opening.
- DO NOT use any media other than the media supplied with this fireplace or listed in Service Parts Section in this manual.
- DO NOT use more than 14 lb. of media per CD4842-MOD or 12 lb. per CD4236-MOD fireplace.  
Extra media may be saved for future use.

1. Place media evenly on the base pan. Figure 10 shows properly placed media.
2. The media can only be placed in the shaded areas as shown in Figure 8 and Figure 9.
3. Do not apply media over the pilot opening. See Figure 8 and Figure 9.
4. The rock fixture assembly is factory installed in the appliance. See Figure 5 and Figure 6.
5. After the media is properly installed, carefully remove the rock fixture assembly. Do not allow any media to fall into the opening. See Figure 7. Store the rock fixture assembly under the appliance for future use.



Figure 5. Rock Fixture Installed



Figure 6. Rock Fixture Assembly Installed



Figure 7. Remove Rock Fixture Assembly

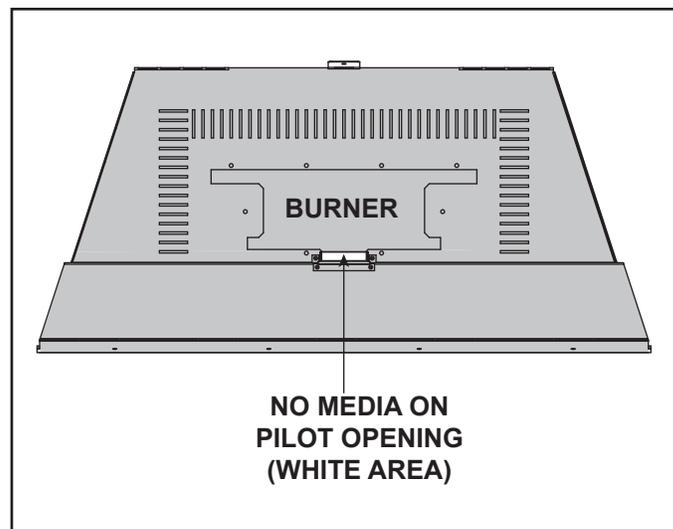


Figure 8. Placement of Media

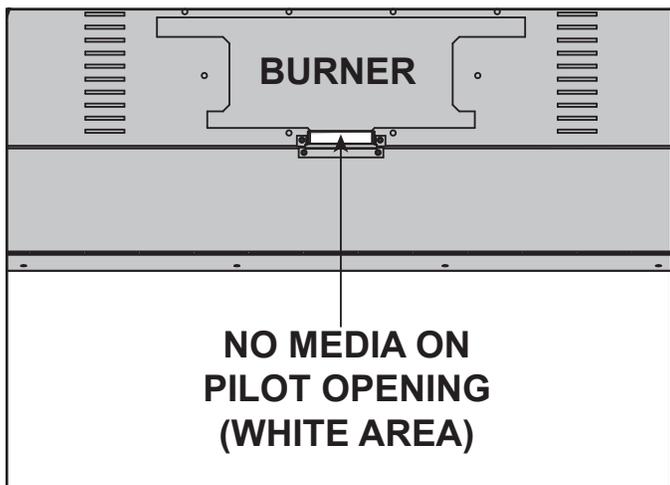


Figure 9. Placement of Media



Figure 10. Proper Placement of Media

6. Place stones randomly over the top of media to achieve the desired look. Stones must be placed in a single layer only.
7. Remove rock placement jig.



Figure 11. Placement of Stones

## INSTALLATION:

For use with STPR-MOD-KIT: GDST4336IFT, GDFL4136IFT, ST-36TRB-IFT, PIER-36TRB-IFT

**WARNING! Risk of Explosion!** Follow media placement instructions. Improperly placed media interfere with proper burner operation. Fireplace will not function properly. Delayed ignition may occur.

**WARNING! Choking Hazard!** Keep media out of reach of children.

- DO NOT place media in pilot opening.
- DO NOT place media in a position that it may fall into the pilot opening.
- DO NOT use any media other than the media supplied with this fireplace or listed in Service Parts Section in this manual.
- DO NOT use any more media than that which is provided in the STPR-MOD-KIT.

Extra media may be saved for future use.

1. Ensure the media has been properly installed according to the instructions provided with the media kit. Media should be evenly distributed and should not be placed directly in front of the pilot opening.
2. Locate the rock stop that was included with the STPR-MOD-KIT. Fasten the rock stop to the pilot shield with one screw. Place the stone jig as shown in Figure 12.
3. Place stones randomly over the top of the media to achieve the desired look. Stones must be placed in a single layer only. Do not place stones on top of the stone jig.
4. After the media is properly installed, carefully remove the stone placement jig. Remove the rock stop from the pilot shield. Do not allow any media to fall into the opening in front of the pilot. See Figure 12.
5. Store the stone placement jig and rock stop in the control cavity of the appliance for future use.



Figure 12. Placement of Stones - STPR-MOD-KIT

Please contact your Hearth & Home Technologies dealer with any questions or concerns.

For the location of your nearest Hearth & Home Technologies dealer, please visit [www.hearthnhome.com](http://www.hearthnhome.com).

Hearth & Home Technologies  
7571 215th Street West, Lakeville, MN 55044  
[www.hearthnhome.com](http://www.hearthnhome.com)